


WK02-30GB

DC Motor Stand Banding Machine

■ Easy Operation

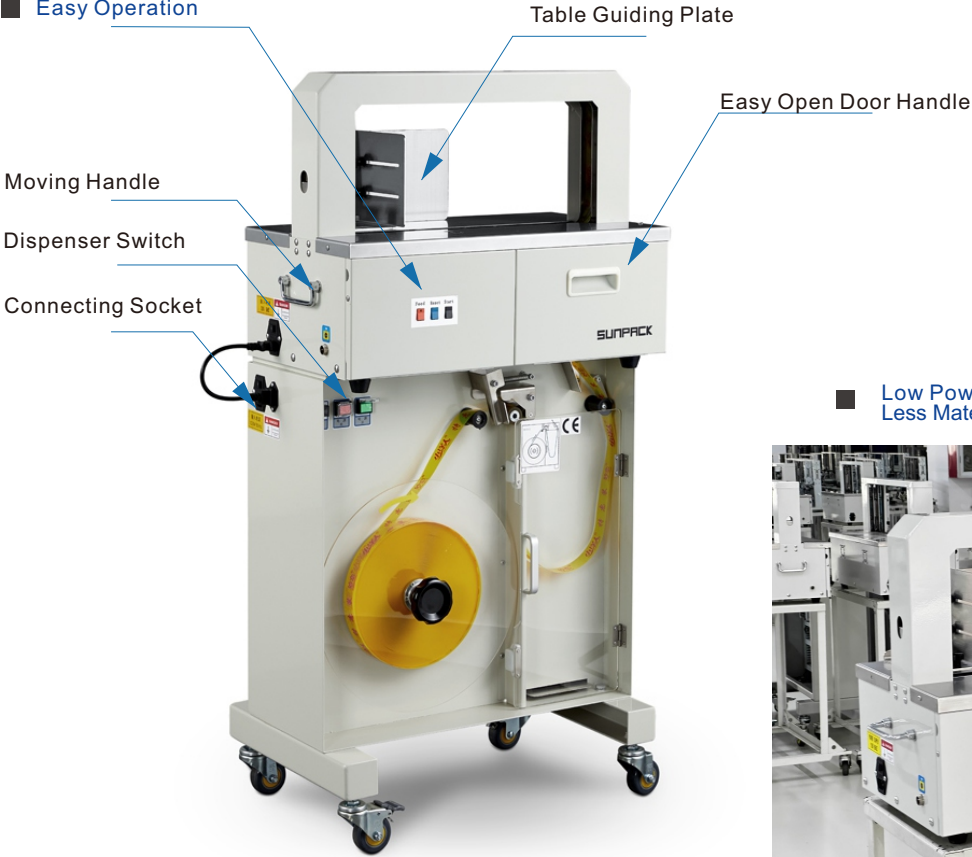

■ Low Power Consumption
Less Material Consumption



WK02-20GB/WK02-30GB

WK02-20G/WK02-30G

■ Easy Maintenance



Loose 2 screws to Clear
Jammed Band

■ Rigid Guide Way



24 Hours Working

■ Easy HMI



-Open HMI for Parameter Setting
-Password Required Operation
-With Counter

■ Specification

Model No	WK02-20G / WK02-30G	WK02-20GB / WK02-30GB
Tape specification	W: 19.2-19.6mm / 29.2-29.6mm Thickness: 80-120mu	W: 19.2-19.6mm / 29.2-29.6mm Thickness: 80-120mu
Tape type	Opp film or Paper tape	Opp film or Paper tape
Arch size	470 X 200mm	470 x 200mm
Roll size	40MM Diameter X 150M L	76MM Diameter x 1000M L
Banding size	Max 460 X 200mm; Min30 X 10mm	Max 460 x 200mm;Min 30 x 10mm
Power supply	220V/110V 50HZ/60HZ 1Phase DC	220V/110V 50HZ/60HZ 1 Phase DC
Control system	PCB	PCB
Banding speed	25PCS/M	25PCS/M
Net weight	35KG	72kg
Welding method	Heat sealing	Heating sealing
Banding tension	5-40N	5-40N

Paper Banding Material



White&Brown Paper



Printed Paper



Printed OPP Tape

Tape type	Core diameter	Width	Thickness	Length	Packing	Carton dimension	GW	NW
Paper	40mm	19.2-19.6mm	80gsm	150m	28rolls/carton	36.5 x 36.5 x 48cm	26kg	23kg
Paper	40mm	29.2-29.6mm	80gsm	150m	28rolls/carton	36.5 x 36.5 x 48cm	26kg	23kg
OPP film	40mm	19.2-19.6mm	80-120mu	150m	28rolls/carton	36.5 x 36.5 x 48cm	26kg	23kg
OPP film	40mm	29.2-29.6mm	80-120mu	150m	28rolls/carton	36.5 x 36.5 x 48cm	26kg	23kg

Tape type	Core diameter	Width	Thickness	Length	Packing	Carton dimension	GW	NW
Paper	40mm	19.2-19.6mm	80gsm	500m	14rolls/carton	31.5 x 30.5 x 43cm	24kg	21kg
Paper	40mm	29.2-29.6mm	80gsm	500m	14rolls/carton	31.5 x 30.5 x 43cm	24kg	21kg
OPP film	40mm	19.2-19.6mm	80-120mu	500m	14rolls/carton	31.5 x 30.5 x 43cm	24kg	21kg
OPP film	40mm	29.2-29.6mm	80-120mu	500m	14rolls/carton	31.5 x 30.5 x 43cm	24kg	21kg